




Q100
IP31

Pulse plating
and reverse
of polarity



Q300
NEMA12

Air-cooled
with forced
conveyed air



Q300
IP21

Air-cooled




Q500
IP42 e IP54

Water-cooled



For each model, provided the remote control module with buttons and potentiometers. On each version as standard for PC control attack or PLC with RS485 serial line. Optional Profibus protocols, Profinet, EthernetIP, Devicenet.

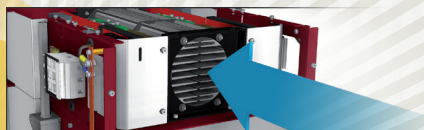

Forced air cooling
focused on the heatsinks, for greater
protection of electronic circuits

From small galvanic laboratories to toughest applications,
CRS offers reliable rectifiers switching solution,
complete and high-performance with low power consumption,
size and low weight

www.crspower.com

CRS

Via Monte Bianco, 40
23807 Merate (LC)

Ph: +39 (039) 928 5507 int. 2737
Fax: +39 (039) 598 3566
Email: sales@crspower.com

PAOLO CARLOTTO | Sales Assistance
Mobile: +39 (338) 154 6927
Email: paoloc@crspower.com

